


IMA80G15**4K Real-time Illumination AI HD Network Camera Module**


The IMA80G15 4K Real-time lighting AI high-definition network camera module adopts upgraded H.265 encoding technology, and the environmentally friendly series brings efficient video compression capabilities. It can save bandwidth and storage space. Embedded web server, supporting internet exploration monitoring, configuration, and upgrade; Standard SDK (Linux, Windows), easy to integrate with other digital systems.

Key Features:

- 1/2.8"8MP IMX415 Sensor
- Maximum resolution up to 3840x2160@30fps
- True Day/Night, 3D DNR, Digital WDR
- Support Motion Detection
- Support AI human detection ,vehicle detection
- Support the P2P on Android, IOS
- Support two way audio
- Support ONVIF2.4
- Support TCP/IP/HTTP/NTP/DHCP/SMTP/RTSP

Technical specifications:

Image sensor	
Sensor	1/2.8" 8MP IMX415 CMOS
Maximum resolution	3840x2160@30fps
Minimum illumination	Color: 0.05Lux B/W: 0.01Lux
Camera	
AGC	Auto/Manual
S/N ratio	≥50dB (AGC OFF)
Shutter speed	1/2 - 1/20 ,000s, Slow shutter support
Wide dynamic range	Digital WDR≥73.7dB
Exposure mode	Auto/ Manual/shutter mode
White balance	Auto/ Manual /ATW/ Indoor/Outdoor/ lamp
Day & Night	External control (IR Cut Filter)
Image resolution	
Main stream	3840 ×2160/3072x2048/2592x1944@30fps
Sub stream	640×480/480x360/352×288/176×144@30fps
Protocol	
Network protocol	HTTP/RTSP/DHCP/NTP/P2P/ONVIF
Network interface	
Wired	1ch 10/100BaseT Ethernet, RJ45 interface
Other	
Power supply	12VDC
Size	38x38mm
Operation temperature	-10°C~50°C
Working humidity	≤90% RH (non-condensing)

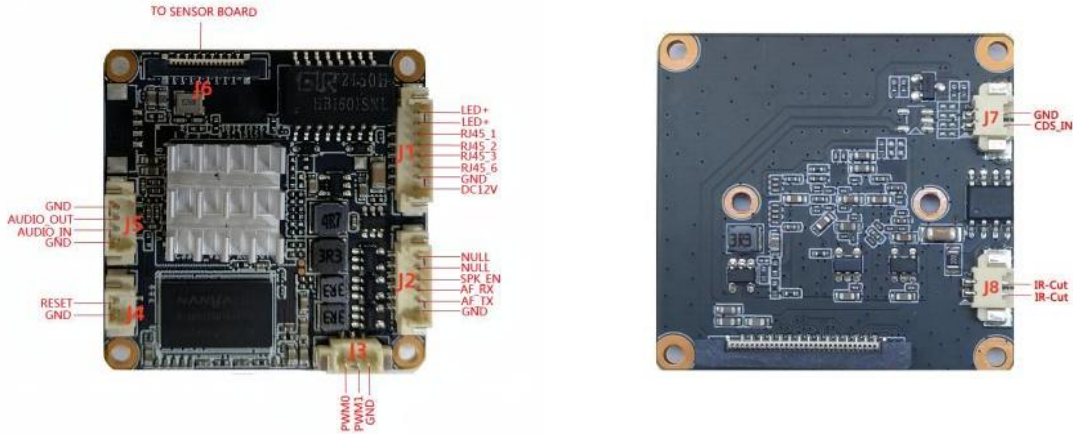

Interface	Pin	Pin name	Functional parameter
J1	1	DC12V+	DC12Vinput
	2	GND	Gnd
	3	RJ45_6	Network receiving differential signal RJ6
	4	RJ45_3	Network receiving differential signal RJ3
	5	RJ45_2	Network receiving differential signal RJ2
	6	RJ45_1	Network receiving differential signal RJ1
	7	LED_+	Network connection indicator light positive
J2	8	LED_+	Network status indicator light positive
	1	Gnd	Gnd
	2	AF_TX	AF automatic focusing interface
	3	AF_RX	NC
	4	SPK_EN	Reserved
	5	NULL	Reserved
J3	6	NULL	Gnd
	1	PWM0	Soft photosensitive infrared
	2	PWM1	Soft photosensitive warm light
J4	3	GND	Gnd
	1	RESET	Reset
J5	2	GND	Gnd
	1	GND	Gnd
	2	AUDRO_OUT	External speaker
	3	AUDRO_IN	Active/Passive Pickup
J6	4	GND	Gnd
	1	To SENSOR BOARDT	Cable interface
J7	1	GDS_IN	Infrared light control signal input
	2	GND	Gnd
J8	1	IR-CUT	Output
	2	IR-CUT	Output

