


## IM20A01W-5X

### 2.0MP 5X Automatic zoom WIFI IPC Module

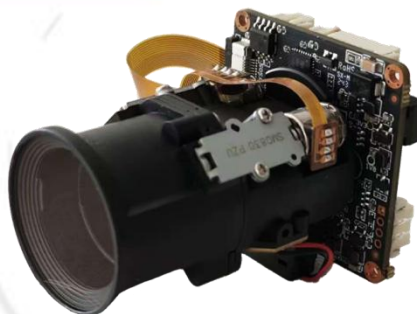

The IM20A01W-5X is a cost-effective 2MP surveillance network camera module designed for both indoor and outdoor use. It features a 1/2.8" Sony IMX307 STARVIS sensor and is powered by the GOKE GK7205V200 SoC, equipped with 512Mb of RAM. It supports 2.4G WiFi and RJ45 Network Connectivity. In terms of extended I/O capabilities, it supports dual light source illumination, as well as microphone and speaker connections, enabling two-way audio and additional interfaces.

For secondary development, the IM20A01W-5X includes two set UART interfaces and provides SDKs for Windows, Linux, and Android. It also supports the ONVIF standard protocol, along with OpenIPC and FPV firmware. This makes it highly convenient for secondary development and allows for quick integration into your projects.


### Key Features:

- 1/2.8" 2MP Sony IMX307 STARVIS CMOS
- Maximum resolution up to 1920×1080@30fps
- 5X optical synchronous focusing, with clear images throughout the zoom process
- Supports 2.4G WiFi and RJ45 Network Connectivity
- Support humanoid detection, motion detection
- Support the Tuya P2P on Android, IOS
- Support two way audio, Built-in audio amplifier function
- Support ONVIF and HIK/XM protocol
- Support TCP/IP/HTTP/NTP/DHCP/SMTP/RTSP
- Open SDK(Linux, Windows), CGI, Support OPENIPC development

## Technical Specifications:

<b>Image Sensor</b>	
Sensor	1/2.8" 2MP Sony IMX307 STARVIS CMOS
Maximum Resolution	1920x1080@30fps
Minimum Illumination	0.01lux @F1.0(Color) / 0.005 lux@F1.0 (B/W)
<b>Shot</b>	
Focal length	2.8-12mm, F1.7~3.0
Viewing angle	128°(nearfocus)~30°(farfocus)
<b>Camera</b>	
AGC	Auto/Manual
S/N Ratio	≥45dB (AGC OFF)
Shutter Speed	1/2 - 1/20 ,000s,Slow shutter support
Wide Dynamic Range	Digital WDR
Exposure Mode	Auto/ Manual/shutter mode
AWB	Yes
Day & Night	External control (IR Cut Filter)
Light Control	Support IR/White/dual light, three mode independent control
<b>Compression</b>	
Video Compression	H.265/H.264 Main Profile /M-JPEG
Audio Compression	G711U,G711A,PCM
<b>Image Resolution</b>	
Main Stream	1920 × 1080@30fps
Sub Stream	640×480/480×360/352×288/176×144@30fps
<b>General Protocol</b>	
Network Protocol	TCP/IP/HTTP/NTP/DHCP/SMTP/RTSP/P2P
ONVIF protocol	Yes
Compatibility	Support HIK/XM protocol
<b>P2P</b>	
Support TUYA APP	Support for Tuya APP (Android, IOS)
<b>Function</b>	
Autofocus / Zoom	Yes
Web Configuration	Yes
OSD	Yes
Motion Detection	Yes
Humanoid Detection	Yes
Reset	Support cable reset button(optical)
Amplifier	Built-in amplifier
<b>Interface</b>	
Wired	1ch 10/100 BaseT Ethernet,RJ45 interface
WIFI	2.4G, IEEE802.11 b/g/n protocol, supporting WEP, WPA, WPA2
Audio	Microphone input/output
Alarm	2 ports input, 2 ports output
UART	Support
TF Card	Optional and max to 128GB
<b>Other</b>	
Power Supply	DC 12V
Size/Weight	38x38x60mm /42g
Operation Temperature	-10°C~50°C
Working Humidity	≤90%RH(non-condensing)

## Interface Pin Definition:

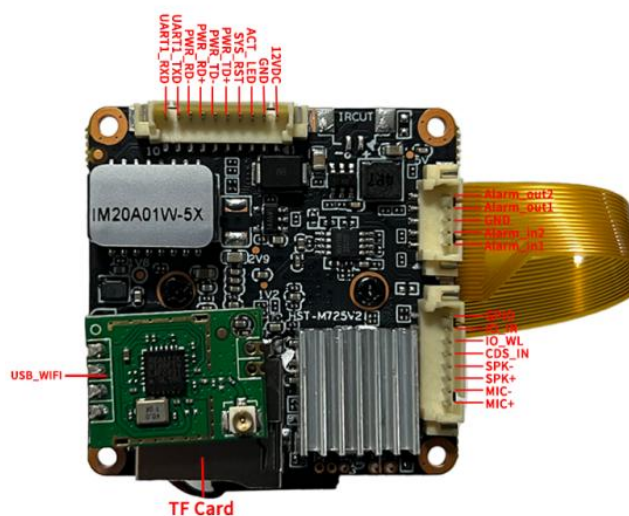

Interface	pin	Pin name	Functional parameter
<b>J1</b>	1	12VDC	DC power input, voltage range 5V-13.8V
	2	GND	GND
	3	ACT_LED	Network indicator light interface
	4	SYS_RST	Restore factory settings LOW valid
	5	PWR_TD+	Adaptive network interface, physically receiving/transmitting signals (differential +)
	6	PWR_TD-	Adaptive network interface, physically receiving/transmitting signals (difference -)
	7	PWR_RD+	Adaptive network interface, physically receiving/transmitting signals (differential+)
	8	PWR_RD-	Adaptive network interface, physically receiving/transmitting signals (difference -)
	9	UART1_TXD	Serial communication, sending TX
	10	UART1_RXD	UART1, receive RX
<b>J3</b>	1	Alarm_in1	Alarm input 1
	2	Alarm_in2	Alarm input 2
	3	GND	GND
	4	Alarm_out1	Alarm relay output 1
	5	Alarm_out2	Alarm relay output 2
<b>J4</b>	1	MIC+	MIC+
	2	MIC-	MIC-
	3	SPK+	SPK+
	4	SPK-	SPK-
	5	GDS_IN	Hard light sensitive infrared
	6	IO_WL	Soft photosensitive white light
	7	IO_IR	Soft photosensitive infrared
	8	GPIO	8 preview GPIO (PWM not supported)
<b>J5</b>	1-4	USB-WIFI	2.4G WiFi module
<b>J6</b>	—	TF card	TF card storage (up to 128GB)