

XVR-116G



Key Features


- Support H.265/H.264 video formats
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 16-channel BNC input
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920*1080
- Long transmission distance over coax cable

Specifications

Model	XVR-116G
Video/Audio Input	
Analog Video Input	16-ch, BNC
IP Video Input	8-ch(only IP up to 24ch), each channel up to 8MP
Supported Analog Camera Types	<p>Support AHD input:</p> <p>5MP@12fps 4MP@15fps 1080P@30fps 720P@30fps</p> <p>Support TVI input:</p> <p>5MP@12fps 4MP@15fps 1080P@30fps 720P@30fps</p> <p>Support CVI input:</p> <p>4MP@15fps 1080P@30fps 720P@30fps</p> <p>Support CVBS input</p>
Audio Input	1-ch, RCA

Two-way Audio	1-ch, RCA
Network	
Incoming Bandwidth	40Mbps
Outgoing Bandwidth	64Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
Video/Audio Output	
VGA Output	1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
HDMI Output	1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Audio Output	1-ch, RCA
Synchronous Playback	16-ch
Encoding	
Recording Resolution	5MP Lite/4MP Lite /1080P/720P/4CIF/CIF
Recording Frame Rate	Main stream: 5MP Lite@6fps 4MP Lite@8fps 2MP Lite@15fps 2MP@8fps 720P@15fps Sub stream: D1@15fps(Max)
Hard Disk	
SATA	1 SATA interface
Capacity	Up to 6TB for each HDD
External Interface	
Network Interface	1RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel:2 x USB2.0
General	
Power Supply	12V DC Power Consumption: ≤ 8 W(without HDD)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing)
Dimensions(W×D×H)	255mm ×215mm× 42mm (10.0" × 8.5"×1.7")
Weight (without HDD)	≤1.1 Kg (2.42lb)

Dimensions

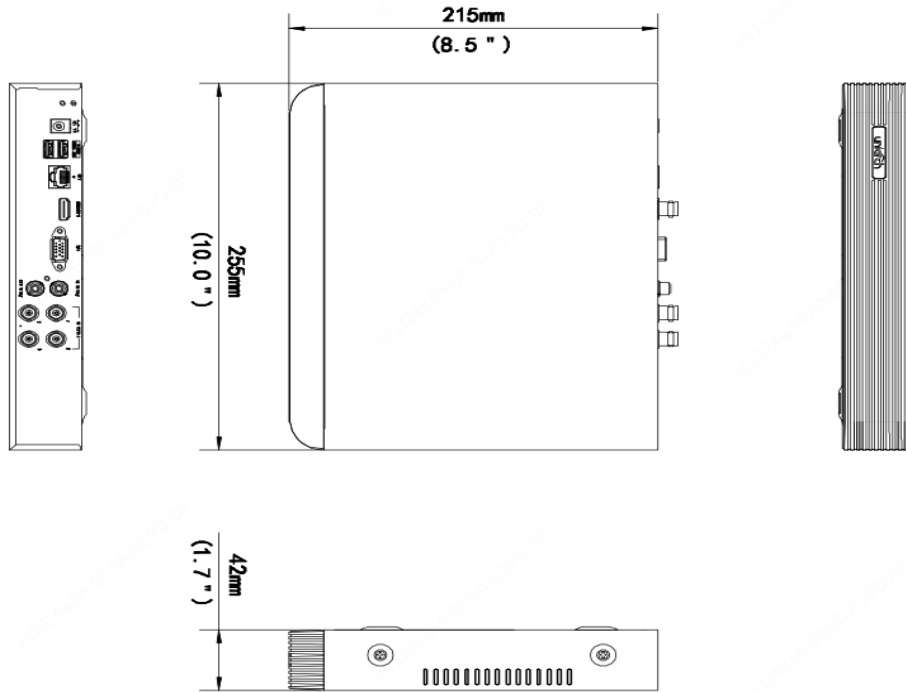

Rear Panel

Take XVR-104-G for example

